



SAT Spray Gun

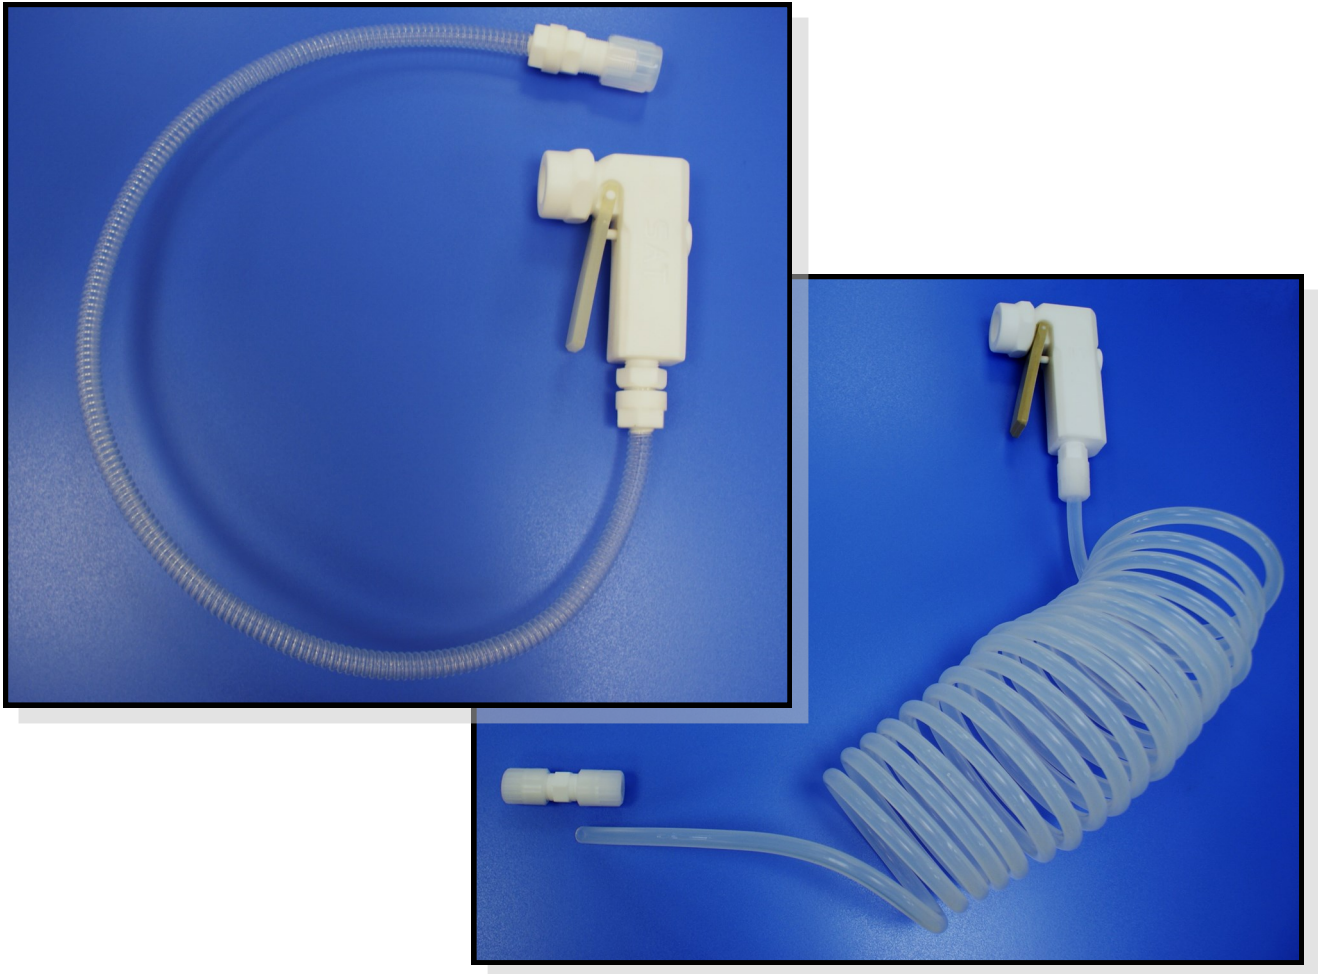

SAT Spray Guns are designed to eliminate bacterial growth in DI water spray gun systems. When the spray gun is not in use, the DI water travels back down the parallel recirculation orifice and discharges to the user's DI recovery or drain line. This continuous recirculation path eliminates bacterial growth caused by stagnant water in the lines.

SAT Spray Guns feature a 100% virgin PTFE wetted fluid path, making them ideal for high-purity requirements for the semiconductor industry.

Kit SAT Spray Gun




with straight tubing

Ordering Information

#	Part number	Description	Material
1	SATKGUN-1	Gun	Teflon or PFA 450HP
2	SATKGUN-2	Interconnecting Fitting	Teflon or PFA 450HP
3	SATKGUN-3	Straight Tubing*	PFA 450HP
4	SATKGUN-4	Interconnecting Fitting	Teflon or PFA 450HP

* Tubing lenght

Part number	Description	Material
SATKGUN-31	Straight Tubing - 1 meter	PFA 450HP
SATKGUN-315	Straight Tubing - 1,5 meters	PFA 450HP
SATKGUN-32	Straight Tubing - 2 meters	PFA 450HP



with corrugated tubing

Ordering Information

#	Part number	Description	Material
1	SATKGUN-1	Gun	Teflon or PFA 450HP
2	SATKGUN-2	Interconnecting Fitting	Teflon or PFA 450HP
3	SATKGUN-5	Corrugate Tubing*	PFA 450HP
4	SATKGUN-4	Interconnecting Fitting	Teflon or PFA 450HP

* Tubing lenght

Part number	Description	Material
SATKGUN-51	Corrugated Tubing - 1 meter	PFA 450HP
SATKGUN-515	Corrugated Tubing - 1,5 meters	PFA 450HP
SATKGUN-52	Corrugated Tubing - 2 meters	PFA 450HP

Kit SAT Spray Gun



with convulated tubing

Ordering Information


#	Part number	Description	Material
1	SATKGUN-1	Gun	Teflon or PFA 450HP
2	SATKGUN-2	Interconnecting Fitting	Teflon or PFA 450HP
3	SATKGUN-5	Convulated Tubing*	PFA 450HP
4	SATKGUN-4	Interconnecting Fitting	Teflon or PFA 450HP

** Tubing lenght*

Part number	Description	Material
SATKGUN-51	Convulated Tubing - 1 meter	PFA 450HP
SATKGUN-515	Convulated Tubing - 1,5 meters	PFA 450HP
SATKGUN-52	Convulated Tubing - 2 meters	PFA 450HP

SAT Spray Gun

Exploded view

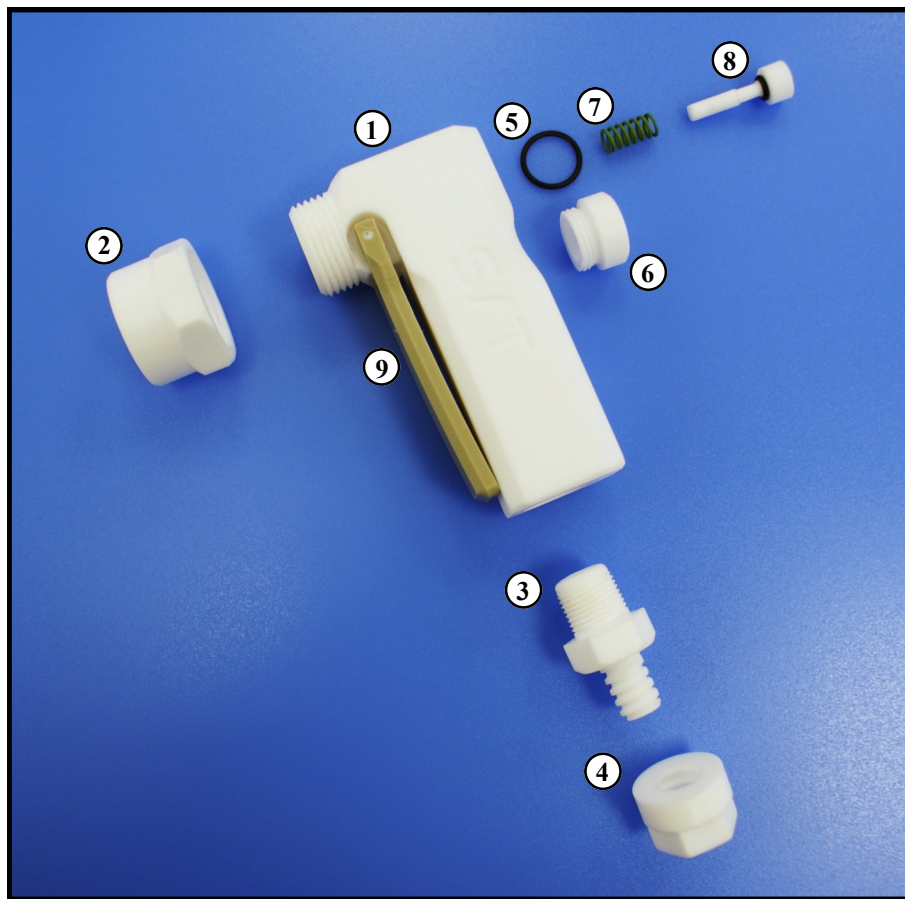

#	Part number	Description
1	SATGUN-01	Body Gun
2	SATGUN-02	Adaptor
3	SATGUN-03	Fittings
4	SATGUN-04	Corrugate adaptors
5	SATGUN-05	O-Ring
6	SATGUN-06	Cup
7	SATGUN-07	Spring
8	SATGUN-08	Piston
9	SATGUN-09	Grilletto

Specifications

Materials : Teflon or PFA 450HP

Orifice : 0,5 mm diameter

Connection : 3/8" or 1/2" SAT-Corrugate

Actuation Type : Manual Spray

SAT Group

Via A. Agosta, 31/33 (Zona Ind.le) - 95121 Catania (Italy)
Tel. (+39) 095 292370 Fax (+39) 095 292371

www.fluorosat.com - info@fluorosat.com